



accura B4 TYPE

SQUARE GMP DOUBLE
ROTARY TABLET PRESS
27 Stn. 'D' Tooling, 27 Stn. 'B' Tooling,
35 Stn. 'B' Tooling, 45 Stn. 'BB' Tooling,


TECHNICAL SPECIFICATIONS

TYPE	B4-27-D	B4-27-B	B4-35-B	B4-45-BB
Number of Station	27	27	35	45
Type of tooling (As Per EU1)	D	B	B	BB
OutputTablets/hour (Min / Max.)(Single Layer)	55,080 / 1,29,600	55,080 / 1,29,600	71,400 / 1,68,000	91,800 / 2,16,000
OutputTablets/hour (Min / Max.)(Bi-Layer)	16,200 / 40,500	16,200 / 40,500	21,000 / 52,500	27,000 / 67,500
Turret RPM (Min./Max.)(Single Layer)	17 / 40			
Turret RPM (Min./Max.)(Bi-Layer)	10 / 25			
Max. Operating Pressure-Main (kN)	100	65		
Max. Tablet Diameter (mm)	25	16	11	
Max. Tablet Thickness (mm)	8.5			
Max. Depth of fill (mm)	20mm	17.5mm		
Pressure Roll Diameter	8-1/2" (215.9mm)	8" (203mm)		
Upper punch entry Main	1.5 to 8mm			
Main Electric Motor (kW/hp)	5.5 Kw / 7.5 Hp x 1440 RPM		3.72 Kw / 5 Hp x 1440 RPM	
Hopper Capacity	15 Litres			
Overall dimensions close guard-cm	112 W x 120 L x 179 H			
Overall dimension Open guard -cm	189 W x 205 L x 206 H			
Case dimensions - cm	132 W x 153 L x 210 H			
Net weight (kg)	1400 Kg.			
Gross weight(kg)	1800 Kg.			
Utilities :	1) Suction Air:-	150 CFM (Qty. - 01 for Single Layer)		
		150 CFM (Qty.- 02 for Bi Layer)		
	2) Power Supply :-	(a) 415 V, 3 Phase, 50 Hz		
		(b) 480 V, 3 Phase, 60 Hz		
		(c) 220 V, 3 Phase, 60 Hz		
	3) Power-Total (kw/hp) :-	8.63 kW / 11.50 hp		

* Depending upon material characteristic & available room atmosphere only.

NOTE : DUE TO CONTINUOUS IMPROVEMENTS IN THE MACHINERIES, SPECIFICATION OF THE MACHINERIES IS SUBJECT TO CHANGE WITHOUT ANY PRIOR NOTICE.

Pre-pressure and Main pressure could be changed depending on the size of the compress and filling depth, powder or granulation. It is dependent on the physical specification of the used material for the compress.
The above specification is the subject to change without prior notice for the technical development.
It is Recommended not to use large depth of fill, minimum tablet thickness and maximum compression pressure for maximum performance consistently. Technical rights to change catalogues, specifications and features are reserved with the manufacturer. Actual output may vary against indicated output on the product under compression and RPM on lower side.

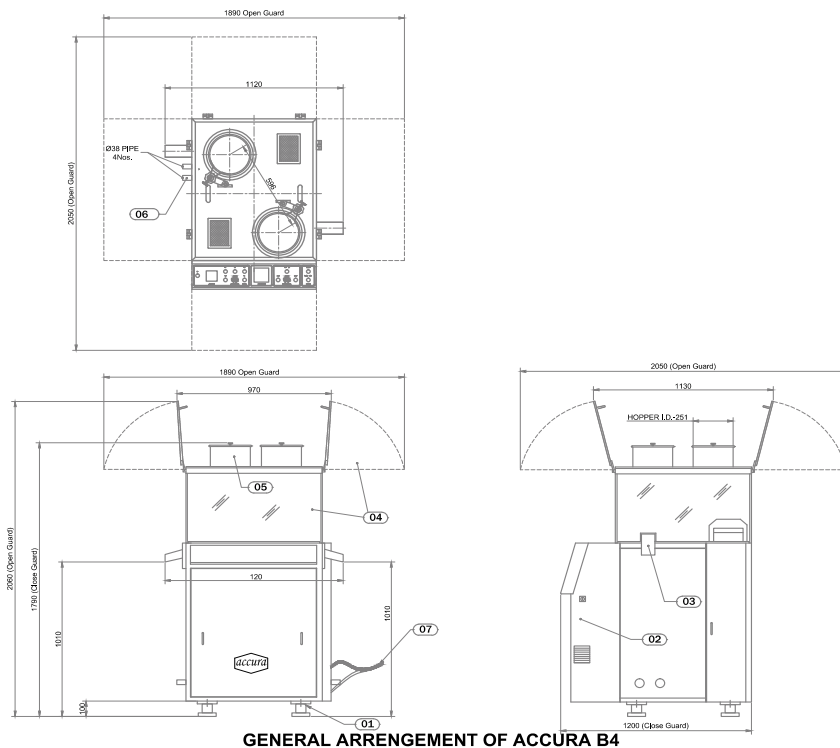

GENERAL ARRANGEMENT OF ACCURA B4

MANUFACTURED BY:



www.fluidpack.net

Factory & Regd. Office: I-4116, PHASE IV, G.I.D.C., VATVA, AHMEDABAD-382 445. (INDIA)

Phone: +91-79-40237888, 2584 0777, 2584 0888, 2584 0999 Fax: +91-79-2584 0888.

Mobile: Mr. M.M. Panchal : + 91- 098250 33305 Mr. Bipin Chawda : +91- 093275 78371

E-mail: info@accurateabletpress.com, fluidpack@accurateabletpress.com, fluidpack83@gmail.com




Fluidpack



accura B4 TYPE

SQUARE GMP DOUBLE ROTARY TABLET PRESS

27 Stn. 'D' Tooling, 27 Stn. 'B' Tooling,
35 Stn. 'B' Tooling, 45 Stn. 'BB' Tooling,



MANUFACTURED BY:



www.fluidpack.net



accura B4 TYPE

SQUARE GMP DOUBLE
ROTARY TABLET PRESS
27 Stn. 'D' Tooling, 27 Stn. 'B' Tooling,
35 Stn. 'B' Tooling, 45 Stn. 'BB' Tooling,



MACHINE DESIGN

- Double rotary tablet press
- Square design with comply cGMP standards
- All contact parts made of SS 316L material
- Speed up to 40 RPM
- 360° operational access
- All tablet parameters control from outside of tableting zone
- Plug & play design
- Bi-layer operation

COMPRESSION ZONE

- Double sided main compression roller - 100kN capacity
- 3 steps Gearbox for higher torque
- Double hopper having-14 Liters capacity
- Gravity Feeding system
- Upper punch penetration up to 8mm
- AC variable Frequency drive for RPM control with Electromagnetic clutch
- Turret of special grade SGI cast iron with electro less nickel plating
- Lubrication port available for upper punch head, Barrel & Gearbox
- Electromagnetic clutch system for smooth start of turret & improve life of motor and gearbox
- Four side Upper Guard with safety interlock

LOWER BASE CABINET


- Main turret drive motor capacity of 7.5 HP in D tooling - 5 HP in B tooling
- Tablet Parameters control systems (Fill depth, Tablet Thickness & Compaction pressure)
- Lower pressure roller
- Manual Lubrication system
- Lower guard made of SS304 Material

ELECTRIC INSTRUMENT & OPERATING

- Electric Panel Front side at lower cabinet
- Front side easy operating system
- Tablet counter
- Ampere counter
- Indication Lamps acknowledge Alarms and status

OPTIONAL ACCESSORIES

- High speed data transfer PLC for smooth operation / 7" touch screen HMI for ease of operation
- Force Feeding System
- Bi-Layer Attachment
- Auto Lubrication System



www.fluidpack.net

